



## GREAT UTOPIAN SDN BHD

NO. 3418, JALAN PEKELILING TANJUNG 27/1, KAWASAN  
PERINDUSTRIAN INDAH PURA, 81000 KULAJAYA, JOHOR.  
Tel : 07-2872282


### PRODUCT DATA SHEET

## ESD PVC CURTAIN (GRID)

-Apply to electronics, foodstuffs, pharmaceuticals, refrigeration and other industries, the electronics industry is particularly applicable to the purification plant, and so on.

-Purification, anti-static, at the temperature, noise, vehicle-free passage

-Soft, transparent, flame retardant and difficult to aging

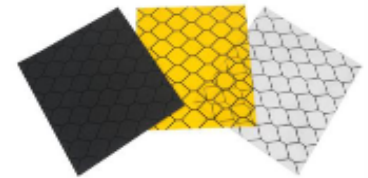

### DESCRIPTION

Wipe with a dry cloth, wipe or not soaking wet, but also prohibited from using cleaning agents, such as alcohol. Surface resistance:  $10^5 \sim 10^9$  ohms; Back Resistance:  $10^5 \sim 10^9$  ohms

### SPECIFICATIONS

| Anti-Static PVC Grid Curtain |                            |                            |                            |
|------------------------------|----------------------------|----------------------------|----------------------------|
|                              | Surface                    | Back                       | Standards                  |
| Surface Resistance           | $10^5 \sim 10^9$ ohms/sq.m | $10^5 \sim 10^9$ ohms/sq.m | ASTM-257                   |
| Electrostatic voltage        | <50V                       | <100V                      | Electro Static Field Meter |
| Flame Retardant              | PASS                       |                            | JIS A-1322                 |
| Tensile Strength             | Length/MD                  | 1.8kg/mm <sup>2</sup>      | ASTM D-822                 |
|                              | Width/TD                   | 1.8kg/mm <sup>2</sup>      |                            |
| 100%Modulus                  | Length/MD                  | 1.1kg/mm <sup>2</sup>      | ASTM D-822                 |
|                              | Width/TD                   | 1.8kg/mm <sup>2</sup>      |                            |
| Elongation                   | Length/MD                  | 170%                       | ASTM D-822                 |
|                              | Width/TD                   | 210%                       |                            |
| Size                         | Thickness                  |                            | 0.3mm                      |
|                              | Width                      |                            | 1.37m                      |
|                              | Length per roll            |                            | 30m                        |